

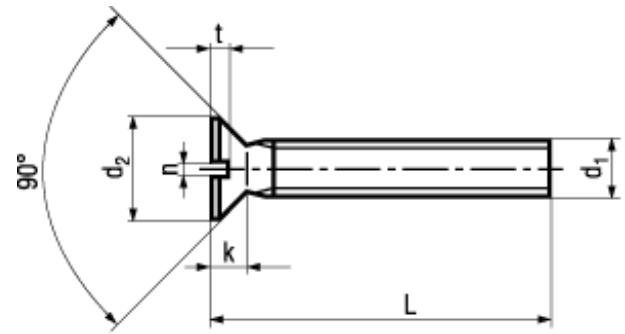


~DIN 963 A

~ISO 2009

PA 6.6

Norme abrogée

**BN 1066****Vis à tête fraisée**

à fente

Polyamide PA 6.6

nature

- ~UNI 6109
- ~ČSN 021151

[3D Cadenas](#)

Article#	Customer Article#	d ₁	d ₂	k max.	n	t	L
3657441		M2	3,8	1,2	0,5	0,4	4
3657442							6
3657443							8
3657444							10
3657445							12
3657446							16
3657449							20
3657453		M2,5	4,7	1,5	0,6	0,5	4
3657455							6
3657456							8
3657457							10
3657458							12
3657460							16
3657461							20
1402994		M3	5,6	1,65	0,8	0,6	6
1403001							8
1403028							10
1403036							12
1403052							16
1403060							20
1403079							25
1403087							30
1403095		M4	7,5	2,2	1	0,8	6
1403109							8

Article#	Customer Article#	d ₁	d ₂	k max.	n	t	L
1403117		M4	7,5	2,2	1	0,8	10
1403125							12
1403141							16
1403168							20
1403176							25
1403184							30
1403192							35
1403206		M5	9,2	2,5	1,2	1	8
1403214							10
1403222							12
1403249							16
1403257							20
1403265							25
1403273							30
1403303							40
1403311		M6	11	3	1,6	1,2	10
1403346							16
1403354							20
1403362							25
1403370							30
1403389							35
1403397							40
1403419							50
1403427							60
1403443		M8	14,5	4	2	1,6	16
1403451							20
1403478							25
1403486							30
1403494							35
1403508							40
1403516							50
1403540		M10	18	5	2,5	2	25
1403559							30
1403567							50