




DIN 963 A

~ISO 2009

4.8

Norme abrogée

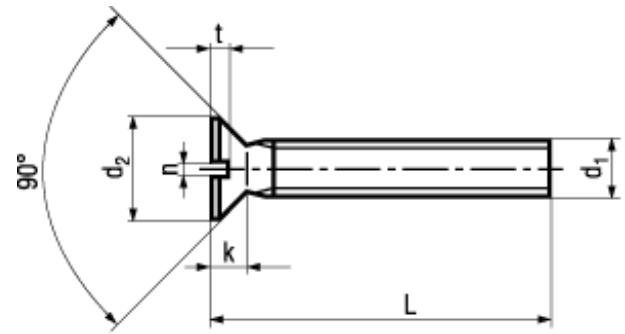

BN 359

Vis à tête fraisée

à fente

Acier 4.8

zingué-jaune

- ~UNI 6109
- ~ČSN 021151

 [3D Cadenas](#)


Toutes les longueurs avec filetage ~ sous tête
Dimensionner les fraisures selon les normes correspondantes!

Article#	Customer Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1141732		M2,5	4,7	1,5	0,6	0,5	4
1141740							5
1141759	1141759						6
1141767							8
1141775							10
1141805							16
1141945		M3	5,6	1,65	0,8	0,6	4
1141953							5
1141961							6
1141988	1141988						8
1141996							10
1142003							12
1142038							16
1142046							(18)
1142054							20
3056171							25
5523890							30
1142100							35
1142119							40
1142127		M4	7,5	2,2	1	0,8	5
1142135							6
1142143							8
1142151							10
1142178							12
1142194							16
1142216							20

Article#	Customer Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1142232		M4	7,5	2,2	1	0,8	25
1142259							30
1142275							40
1142291		M5	9,2	2,5	1,2	1	8
1142305							10
1142313							12
1142348							16
1142364							20
1142380							25
1142402							30
1142410							35
1142429							40
8046255							60
8130817		M6	11	3	1,6	1,2	8
1142437							10
1142445							12
1142461							16
1142496							20
1142526							25
1142542							30
1142550							35
1142569							40
1142585							50