


# BOIS & AGGLOMÉRÉS

## TÊTE FRAISÉE EMPREINTE ÉTOILE

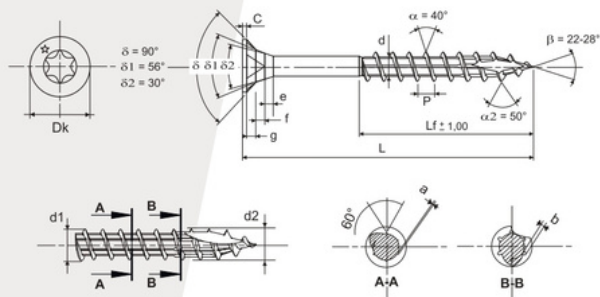

### CARACTÉRISTIQUES TECHNIQUES

	ø 3	ø 3,5	ø 4	ø 4,5	ø 5	ø 6
Profondeur empreinte	1,30 / 1,60	1,40 / 1,70	1,40 / 1,70	1,80 / 2,10	2,10 / 2,40	2,40 / 2,70
N° empreinte	TX 10	TX 15	TX 20	TX 20	TX 25	TX 30
Dk	5,70 ± 0,20	6,70 ± 0,20	7,70 ± 0,20	8,70 ± 0,20	9,30 ± 0,20	11,30 ± 0,20
C	0,30 / 0,60	0,30 / 0,60	0,40 / 0,70	0,50 / 0,80	0,60 / 0,90	0,70 / 1,10
g	1,00	1,20	1,45	1,60	1,63	1,74
f	1,04	1,20	1,35	1,50	1,60	2,32
e	1,01	1,13	1,25	1,39	1,50	2,39
d	1,80 / 2,10	2,00 / 2,30	2,30 / 2,60	2,50 / 2,80	2,90 / 3,30	3,60 / 4,10
P	1,70 ± 10%	2,00 ± 10%	2,30 ± 10%	2,60 ± 10%	2,90 ± 10%	3,50 ± 10%
d1	2,95	3,45	3,95	4,45	4,95	5,95
d2	3,05	3,55	4,05	4,55	5,05	6,05
a/b	0,22 / 0,22	0,22 / 0,27	0,22 / 0,32	0,22 / 0,37	0,22 / 0,42	0,22 / 0,45
Couple de rupture mini	1,80 Nm	2,60 Nm	3,90 Nm	5,00 Nm	7,00 Nm	11,50 Nm

Pour les vis ROCKET inférieures à 25 mm, les diamètres d1 et d2 sont identiques

Tous ø L = 12/16	20/30	35/50*	60/100**	110/120	130/180	200
Tolérance 0/-0,90	0 / -1,05	0 / -1,25	0 / -1,50	0 / -1,75	0 / -2,00	0 / -2,50

\* sauf 6x40/22 = 0/-1,05

\*\* sauf 4x80/45 - 5x90/50 - 5x100/60 = 0/-1,75  
6x80/50 - 6x90/50 = 0/-1,25



EN 14592  
+A1 2012


Acier bichromaté



# \ BOIS & AGGLOMÉRÉS

TÊTE FRAISÉE EMPREINTE ÉTOILE

FILETAGE PARTIEL



TX 



Ø	Longueur totale (L)	Longueur fileté (Lf)	Nombre embout	Type de boîte	Quantité boîte
3	35	22	TX 10	B	500
	40	22	-	B	500
	3,5	30	18	TX 15	B
3,5	35	22	-	B	500
	40	22	-	B	500
	50	30	-	C	500
4	30	18	TX 20	B	500
	35	22	-	C	500
	40	22	-	C	500
	45	30	-	C	500
	50	30	-	C	500
	55	35	-	D	500
	60	35	-	D	500
4,5	35	22	TX 20	C	500
	40	22	-	C	500
	45	30	-	C	500
	50	30	-	D	500
	55	35	-	D	500
	60	35	-	D	500
	70	45	-	C	200

CE


EN 14592  
+A1 2012

\ Acier bichromaté

## \ BOIS & AGGLOMÉRÉS

TÊTE FRAISÉE EMPREINTE ÉTOILE

FILETAGE PARTIEL



Ø	Longueur totale (L)	Longueur filetés (Lf)	Numéro embout	Type de balle	Quantité balle
<b>5</b>	<b>30</b>	18	TX 25	C	<b>500</b>
	<b>35</b>	22	-	C	<b>500</b>
	<b>40</b>	22	-	C	<b>500</b>
	<b>45</b>	30	-	D	<b>500</b>
	<b>50</b>	30	-	D	<b>500</b>
	<b>55</b>	35	-	C	<b>200</b>
	<b>60</b>	35	-	C	<b>200</b>
	<b>70</b>	45	-	C	<b>200</b>
	<b>80</b>	50	-	D	<b>200</b>
	<b>90</b>	50	-	D	<b>200</b>
	<b>100</b>	60	-	D	<b>200</b>
	<b>110</b>	70	-	D	<b>200</b>
	<b>120</b>	70	-	D	<b>150</b>
<b>6</b>	<b>40</b>	22	TX 30	C	<b>200</b>
	<b>50</b>	30	-	C	<b>200</b>
	<b>60</b>	35	-	D	<b>200</b>
	<b>70</b>	45	-	D	<b>150</b>
	<b>80</b>	50	-	D	<b>150</b>
	<b>90</b>	50	-	D	<b>150</b>
	<b>100</b>	60	-	D	<b>150</b>
	<b>110</b>	70	-	D	<b>100</b>
	<b>120</b>	70	-	D	<b>100</b>
	<b>130</b>	70	-	D	<b>100</b>
	<b>140</b>	70	-	D	<b>100</b>
	<b>150</b>	70	-	D	<b>100</b>
	<b>160</b>	70	-	D	<b>100</b>
	<b>180</b>	70	-	H23	<b>100</b>
	<b>200</b>	70	-	H23	<b>100</b>



**CE**  
EN 14592  
+A1 2012



\ Acier bichromaté

