

TÊTE RONDE STANDARD


CONFORME À LA NORME NF EN ISO 15983



INOX A2 INOX A2

Application

Chauffage
Air conditionné
Ventilation
Équipement industriel
Machines
Four industriel
Boulangerie
Appareil médical

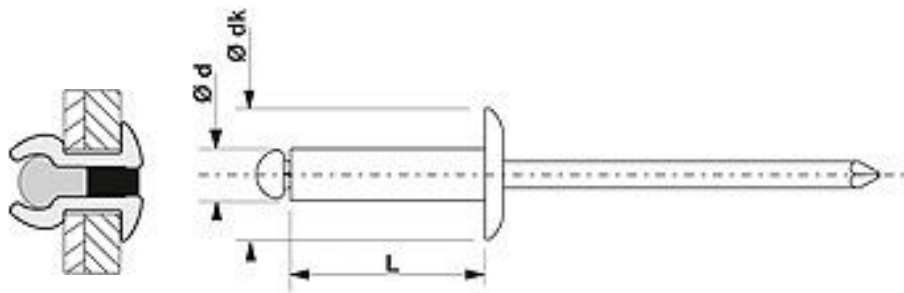

Ø	L	DK				
mm	mm	mm	mm	mm	N	N
2,4	6	5,0	2,0 - 4,0	2,6	1200	1000
3,0	6	6,0	1,0 - 3,0	3,2	2300	1900
3,0	8	6,0	3,0 - 5,0	3,2	2300	1900
3,0	10	6,0	5,0 - 7,0	3,2	2300	1900
3,0	12	6,0	7,0 - 9,0	3,2	2300	1900
3,2	6	6,5	1,0 - 3,0	3,4	2500	1900
3,2	8	6,5	3,0 - 5,0	3,4	2500	1900
3,2	10	6,5	5,0 - 7,0	3,4	2500	1900
3,2	12	6,5	7,0 - 9,0	3,4	2500	1900
3,2	14	6,5	9,0 - 11,0	3,4	2500	1900
3,2	16	6,5	11,0 - 13,0	3,4	2500	1900
3,2	18	6,5	13,0 - 15,0	3,4	2500	1900
4,0	6	8,0	0,5 - 2,0	4,2	3500	2700
4,0	8	8,0	2,0 - 4,0	4,2	3500	2700
4,0	10	8,0	4,0 - 6,0	4,2	3500	2700
4,0	13	8,0	6,0 - 9,0	4,2	3500	2700
4,0	16	8,0	9,0 - 12,0	4,2	3500	2700
4,0	18	8,0	12,0 - 14,0	4,2	3500	2700
4,0	20	8,0	14,0 - 16,0	4,2	3500	2700
4,8	6	9,5	0,5 - 1,5	5,0	5000	4000
4,8	8	9,5	1,0 - 3,0	5,0	5000	4000
4,8	10	9,5	3,0 - 5,0	5,0	5000	4000
4,8	12	9,5	5,0 - 7,0	5,0	5000	4000
4,8	14	9,5	7,0 - 9,0	5,0	5000	4000
4,8	16	9,5	9,0 - 11,0	5,0	5000	4000
4,8	18	9,5	11,0 - 13,0	5,0	5000	4000
4,8	20	9,5	13,0 - 15,0	5,0	5000	4000
4,8	23	9,5	15,0 - 18,0	5,0	5000	4000
4,8	26	9,5	18,0 - 21,0	5,0	5000	4000
4,8	30	9,5	21,0 - 25,0	5,0	5000	4000
6,4	12	12	4,0 - 6,0	6,6	8000	6500
6,4	14	12	6,0 - 8,0	6,6	8000	6500
6,4	18	12	10,0 - 12,0	6,6	8000	6500
6,4	20	12	12,0 - 14,0	6,6	8000	6500
6,4	25	12	14,0 - 19,0	6,6	8000	6500