


Variant	Finitions / Finishes
00	ZnFL Zn-Al + Si 8µ min Magni 2.1 gris/grey BS RR:600H
01	BRUT DE TREMPÉ

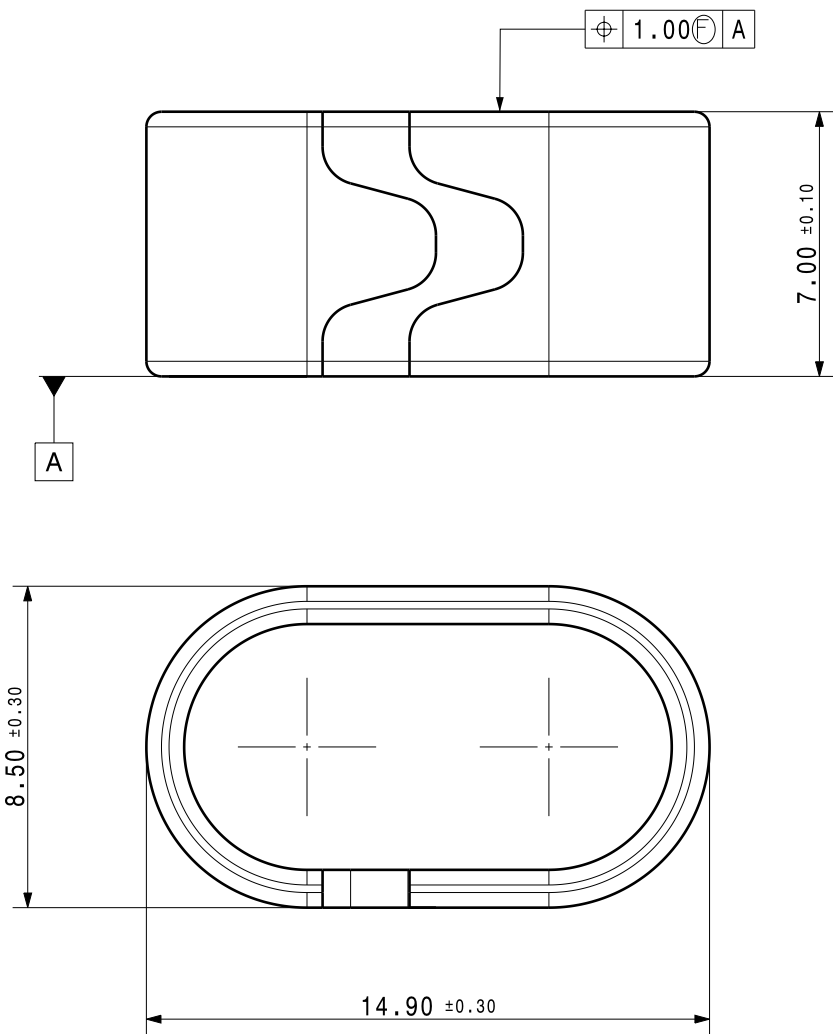

- Logement intérieur bague POUR INFORMATION : 6,50mm +0/-0,30 x 12,40mm +0/-0,30
- Couple de serrage admissible C_i et tenue sur support F_i : à valider pour chaque nouvelle application
- Chanfrein d'entrée obligatoire
- Dans le cas d'une distribution automatique et/ou du surmoulage, le process doit être validé par ARaymond
- Ring inner room FOR INFORMATION : 6,50mm +0/-0,30 x 12,40mm +0/-0,30
- Admissible tightening torque C_i and pull out force F_i : to be validated for each application
- Introduction chamfer required
- If automatic distribution and/or overmoulding, ARaymond must validate the process

Ae	-	MISE A JOUR NOTA	01.12.11	QDE
Ad	-	MISE A JOUR CONDITION D'UTILISATION	06.05.11	QDE
REV.	Quant.	Indice / revision description	Date	Name

Exemple d'utilisation / Use condition

* Epaisseur modifiable / Adjustable thickness

113 cours Berriat BP 157
France - 38019 Grenoble cedex 1
Tel +33 (0) 4 76 33 49 49
Fax +33 (0) 4 76 78 20 50

Si probleme de comprehension, merci de demander la version française a ARaymond avant toute utilisation.

If the addressee does not accept these conditions, please notify A.Raymond sender immediately.
This drawing and all information (the Drawing) disclosed are the exclusive property of A.Raymond.
By using this Drawing the Addressee acknowledges and accepts that this Drawing
(1) is covered by A.Raymond intellectual property rights or know-how, and,
(ii) is provided under the following conditions who represent a Deposit Agreement.
This Drawing is for Addressee' internal use only limited to its estimation.
Without prior written consent of A.Raymond, no permission or rights for any purpose, is hereby granted, such as, without any limitation,
(1) the copy, in part or entirely
(2) and/or the presentation, in part or entirely, to any other third party outside the Addressee' company or in the company but with no interest
(3) and/or the distribution of the Drawing, in part or entirely, in any medium
(4) and/or the creation of any derivative work.
In case of breach of these conditions, Addressee shall indemnify A.Raymond from and against all damages (compensatory or consequential),
costs, expenses and charges, caused or arising out of or attributable to its willful misconduct, fraud, negligence, infringement of A.Raymond' Intellectual Property rights.

Brevets / Patent rights		Safix code XXXXX	
N° Projet		Origine / Origin	Chef de projet / Project Manager COCHARD.M
Echelle / scale 5:1	Format A3	Tolerance / General tolerance Dimension Angle ± 0.50 ± 5.00°	Date Realise / Prepared by DELAHOUSSE.Q
		ALL DIMENSIONS ARE IN MILLIMETERS	Approuve / Approved 20111201141212
		Epaisseur / Mat. thickness 1,00	Volume (mm³) 233,8 Poids / Weight (g) 1,8
Finition /finish Voir nomenclature See parts list			Code finition finish code -
Traitement structural / Material treatment C70D >0,5 : TTH.HR 30 N : 61,3 a 64,7 (42 a 46 HRc)			
Matiere / Material C70D -			Mat. code -
Libelle / Title Bague antifuage OBLONGUE Anti-creep ring OBLONG			
Reference /Part no. 213933-0-00			Drawing type C : Customer
Ref. client / Customer part no.			Planche / Sheet 1/1
CAD system & version CATIA V5 R19 SP7		Nom fichier / File name 213933-OC00	

VERIFIER L ECHELLE APRES PHOTOCOPIE / BEWARE SCALE AFTER COPY