

Pro navarovaci srouby M8 hrube.
 For the M8 weld studs.



pouzitelne pro potrubí nebo hadici : $\varnothing 2 \dots \varnothing 40$
 applicable for pipe or hose : diameter 2 ... 40

(B) Funkční síly:
 testy provádět při standardní teplotě
 a rychlosti 100 mm/min ve směru nejnižšího odporu.

F1: narazeni na M8: 60 N max.
 F2: stazeni z M8: 200 N min.

Performance requirements:
 test to be carried out at ambient temperature
 and speed of 100 mm/min. with forces
 measured in line of least resistance.


F1: push in force for M8: 60 N max.
 F2: pull out force for M8: 200 N min.

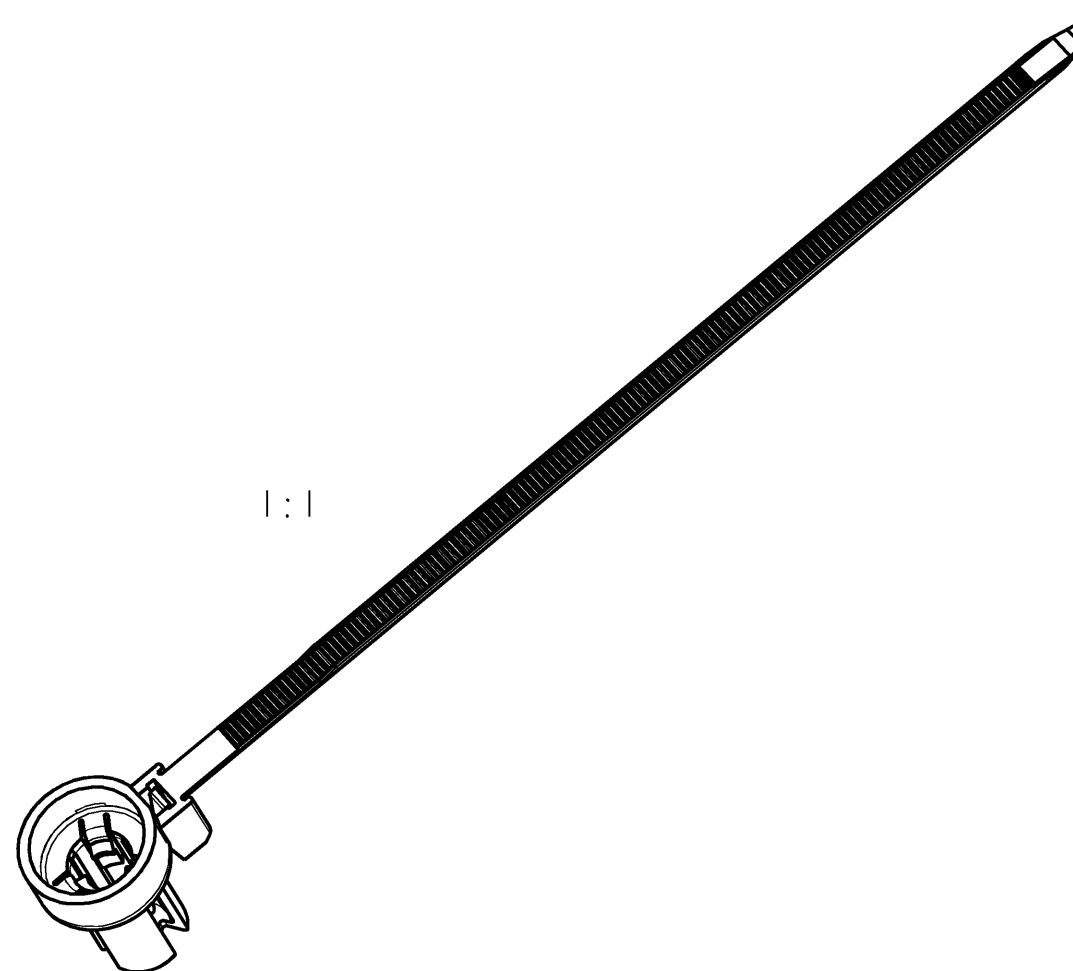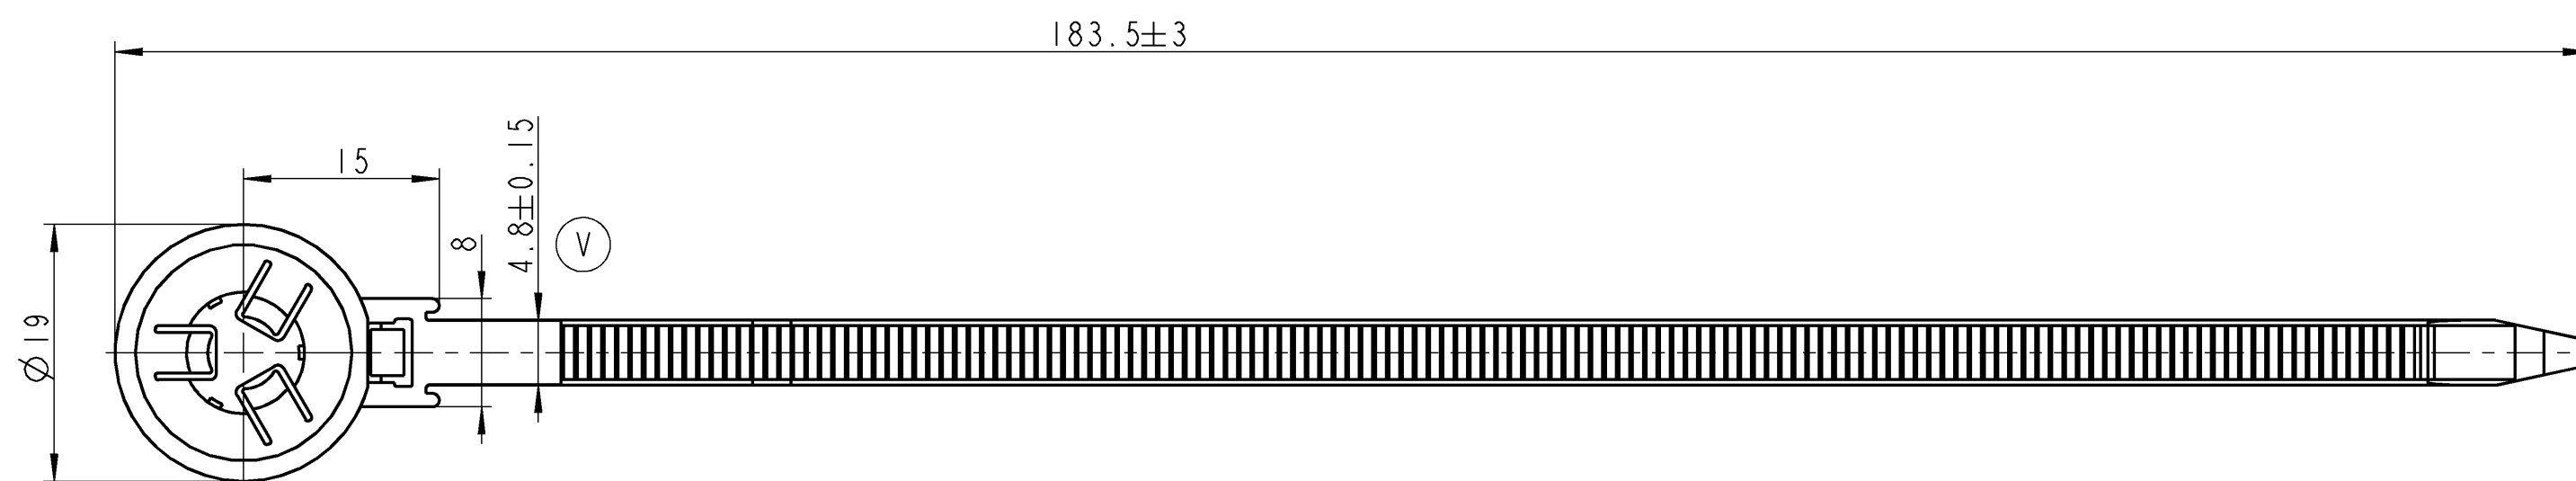

(V) významný znak
 significant characteristic

>400 ≤ 1000	±2
>120 ≤ 400	±1,5
> 30 ≤ 120	±1
> 6 ≤ 30	±0,5
≤ 6	±0,25
Uhel/Angle	±3°

Všeobecné tolerance pro
 neolterované jmenovité rozměry.
 General tolerances for
 nominal dimensions without
 specified tolerance.

B 2x dopl. specifikace sil / performance req. added		17.10.06	Do
A nove cislovani SAP, nový rameček		26.09.06	Sd
new SAP numbering, new drawing frame			
Ind.	Popis / Description	Datum / Date	Ime
Zmeny / Modifications			
CAD - PE - 202587_000		Format: DIN A2	
 A Raymond S.R.O. SPECIALNI UPINACI SYSTEMY			
This drawing and all information (the "Drawing") disclosed are the exclusive property of A.Raymond. By using this Drawing the Addressee acknowledges and accepts that this Drawing (1) is covered by A.Raymond' intellectual property rights in know-how and (2) is provided under the following conditions who represent a Deposit Agreement.		Datum / Date	5.4.04
This Drawing is for Addressee' internal use only limited to its estimation. Without prior written consent of A.Raymond, no permission or rights for any purpose, is hereby granted, such as, without any limitation, (1) the copy, in part or entirely (2) and/or the presentation, in part or entirely, to any other third party outside the Addressee' company or in the company but with no interest (3) and/or the distribution of the Drawing, in part or entirely, in any medium (4) and/or the creation of any derivative work.		Kreslil / Drawn	Dolezal
In case of breach of these conditions, Addressee shall indemnify A.Raymond from and against all damages (compensatory or consequential), costs, expenses and charges, caused or arising out of or attributable to its willful misconduct, fraud, negligence, infringement of A.Raymond' Intellectual Property rights.		C.-prezk./App.	ECBC3A2A21A1C61D
If the Addressee does not accept these conditions, please notify A.Raymond' sender immediately. Jestliže máte problem s porušením těchto podmínek, pak před zahájením práce na tomto projektu kontaktujte adresatele výzvěs za účelem získání nám srozumitelného prohlášení.		F.-prezk./App.	
Patentová práva / Patent rights		Q.-prezk./App.	
vyhrazena / all rights reserved		S.-prezk./ Patent app.	
Meritka/Scale	Všeobecné jinak neurčené tolerance / General tol. unless otherwise specified	Nahraza za / Substitute for	
2:1	viz tabulka / see table		
Uprava materialu / Material treatment		Hmot. / Weight (g)	
Material PA66 houz. za sucha, tepl. odolny / PA66 heat stabilized, dry impact strength.			
Název dílu / Partname		Paska na sroub M8 / Cable strap for M8 weld stud	
Cis. dílu zakazníka / Customer part No.			
202 587.000	2496	7000	cerna / black
Cislo dílu / Part-No.	Kod mat. / Mat. code	Kod barvy / Colour code	Barva / Colour
Cislo dílu / Part-No.		202 587.000	
		C	